



LITHIUM IRON PHOSPHATE BATTERY

ELECTRICAL SPECIFICATIONS

Nominal Voltage	12.8 V
Nominal Capacity	19 Ah
Energy	243.2 Wh
Resistance	60 mΩ
Efficiency	99%
Self Discharge	<3% per Month


DISCHARGE SPECIFICATIONS

Standard Discharge Current	16 A
Maximum Continuous Discharge Current	25 A
PCM Discharge Current Cut-Off	150 A (±20 A)
Recommended Low Voltage Disconnect	11 V
PCM Discharge Voltage Cut-Off	8 V
Reconnect Voltage	>8 V
Short Circuit Protection	200-500 μs

TEMPERATURE SPECIFICATIONS

Discharge Temperature	-4 to 140 °F (-20 to 60 °C)
Charge Temperature	-4 to 113 °F (-20 to 45 °C)
Storage Temperature	-4 to 140 °F (-20 to 60 °C)
PCM High Temperature Cut-Off	149 °F (65 °C)

DIMENSIONAL SPECIFICATIONS

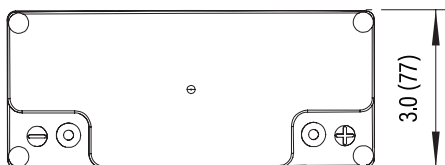

MECHANICAL SPECIFICATIONS


Dimensions (L x W x H)	7.1 x 3.0 x 6.6" 181 x 77 x 168 mm
Weight	6.0 lbs (2.7 kg)
Terminal Type	Anderson Connector
Cell Type	Cylindrical
Chemistry	LiFePO ₄

CHARGE SPECIFICATIONS

Recommended Charge Current	≤8 A
Maximum Charge Current	≤8 A
Charge Current (0 to -10 °C)	≤0.1 C
Charge Current (-20 to -10 °C)	≤0.05 C
PCM Charge Current Cut-Off	150 A (±20 A)
Recommended Charge Voltage	14.4 V
PCM Charge Voltage Cut-Off	15.2 V
Reconnect Voltage	14.4 V
Balancing Voltage	14.4 V

COMPLIANCE SPECIFICATIONS

Certifications	CE (battery) UN38.3 (battery) UL1642 & IEC62133 (cells)
Shipping Classification	UN 3480, CLASS 9






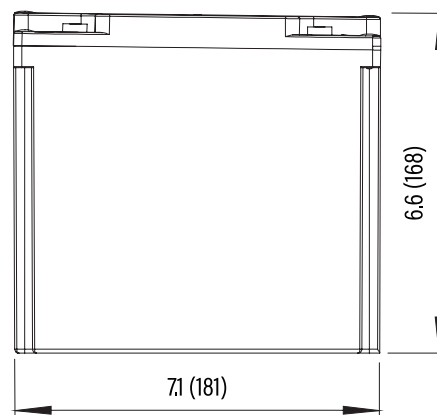




RBGT-19

Golf Trolley Battery

PERFORMANCE CHARACTERISTICS

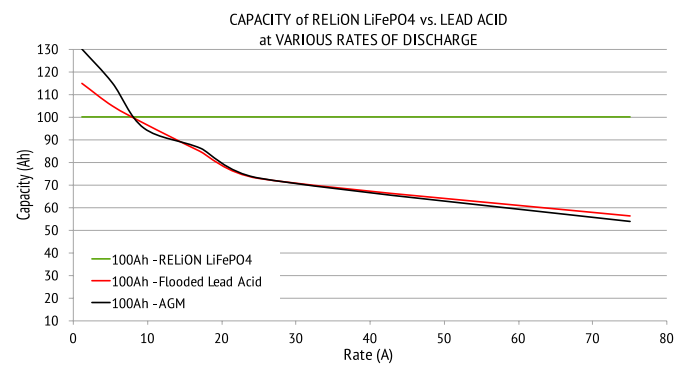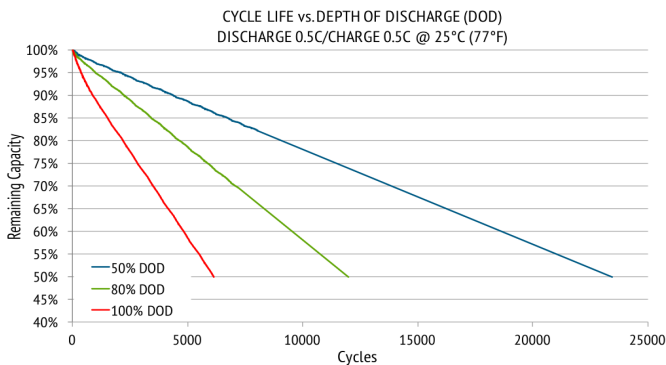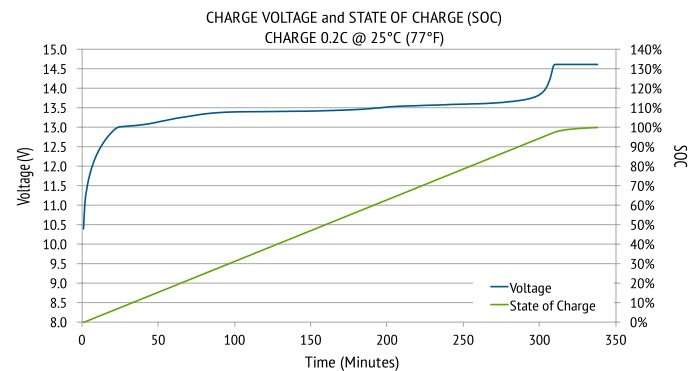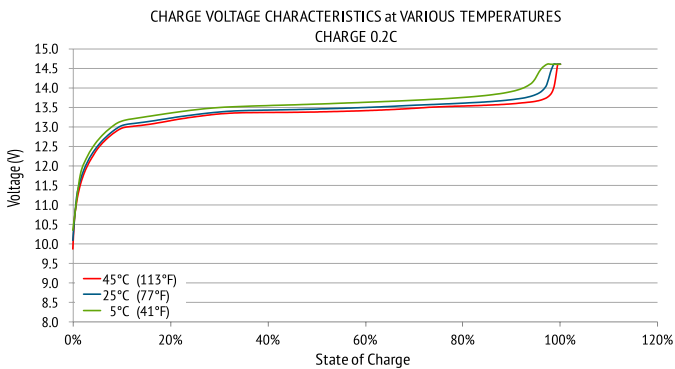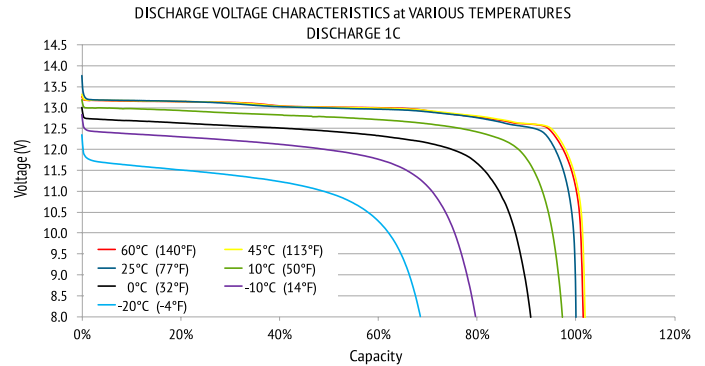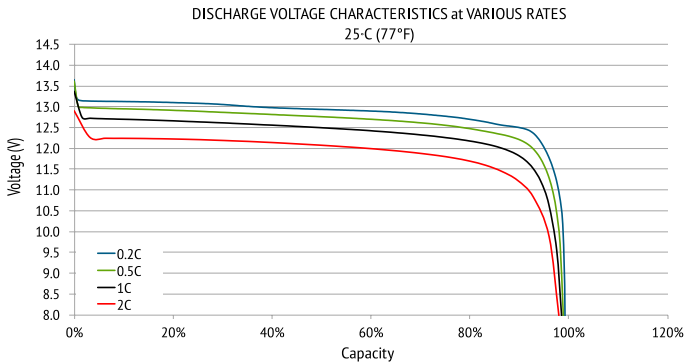

Canada: 1-888-271-8888

United States: 1-844-370-0258

Panama: +507-292-4776

sales@magnacharge.com

UN38.3

